

MYSPY™ WIFI MESSENGER

Indoor Alarm System Provides Remote Notification of High/Low Levels

- NO monthly fees or contracts
- Easy installation and setup
- Excellent solution for areas with poor cellular service (does not rely on cellular connection)
- Uses current WiFi or Ethernet connections
- Text and/or email notifications: alarm, power lost, power restored, low battery and alarm offline
- Notifies up to 4 contacts (2 text and 2 email contacts)
- Great for businesses, rental properties and seasonal homes to help prevent costly damage



N116 W18455 Morse Drive
Germantown, WI 53022
262-253-1353 / 800-234-5490
Fax: 262-253-1248

www.jimmurrayinc.com

SJE Rhombus®

MYSPY™ WIFI MESSENGER

Indoor Alarm Provides Remote Notification

Function

The MySpy™ WiFi Messenger system monitors and reports any residential alarm condition (contact closure), including sump high water level (float switch), or under/over temperature alarms. When the contact closes, the alarm notifies the user locally (audible and visual alarm) and remotely via SMS text messages and/or emails over a WiFi or Ethernet network to a smartphone, tablet or computer.

The alarm works with your existing WiFi or Ethernet network, so it does not rely on cellular connection which means no monthly fees or contracts. **Easy installation and setup!**

Features

- NEMA 1 enclosure rated for indoor use
- Automatic alarm reset
- LED indicators for alarm (red), power on (green) and network status (blue)
- Alarm test, horn silence and WPS connection buttons
- WiFi or Ethernet connectivity for remote alarm notification
- Text and/or email notifications: alarm, power lost, power restored, low battery and alarm offline
- Notifies up to 4 contacts (2 text, 2 email contacts)
- If primary power fails, the alarm continues to operate locally due to 9 VDC battery backup (not included)
- Low battery chirp
- External terminal block for easy float switch installation
- Auxiliary contacts included to connect to remote device
- Can serve as a high or low level alarm depending on float switch model
- Optional float switch models and splice kit available



Models

Description

- **1043586** MSWF-01H, High, 15' SJE SignalMaster®
- **1043655** MSWF-01L, Low, 15' SJE SignalMaster®
- **1043657** MSWF-01X, no float



Installation Diagram

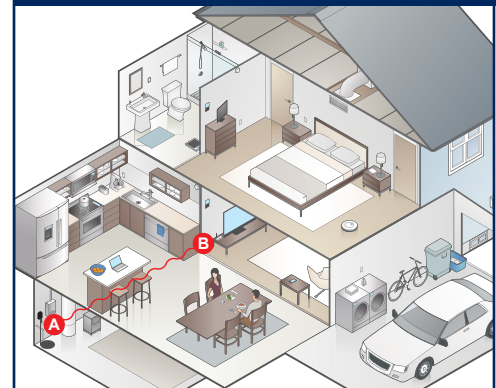

WiFi: Requires a WiFi connection with push button WiFi Protected Setup (WPS) functionality.

Ethernet: Requires an Ethernet connection.



N116 W18455 Morse Drive
Germantown, WI 53022
262-253-1353 / 800-234-5490
Fax: 262-253-1248

www.jimmurrayinc.com

