<u>Mastewater</u>

18S Series



Applications


 Little Giant 18S Series Sump/Sewage Pumps are rated for continuous duty in effluent and sewage waste transfer applications


Features

- 1-1/2 hp permanent split capacitor motor with thermal overload protection on single-phase units
- Oil-filled motor housing for lifetime lubrication and rapid heat dissipation
- Cast iron pump housing with protective epoxy-coating for corrosion resistance
- 3" FNPT discharge
- Brass impeller
- Stainless steel hardware
- Mechanical seal (stainless steel spring, nitrile parts, carbon, and ceramic faces)
- Secondary exclusion seal to help protect mechanical seal
- Capacitor and power cord connections are isolated from oil-filled motor housing for ease of field maintenance
- Handles liquids and solid waste materials up to 2" diameter



Engineering Data

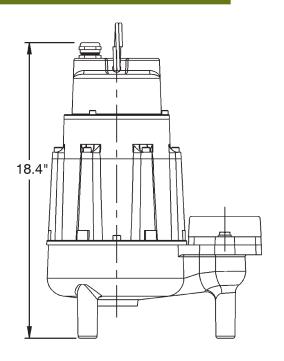



Specifications

Item No.	Model No.	НР	Volts	Hz	Ph	Full Load Amps	RPM	Performance (GPM @ Head)						Discharge	Shut Off		Cord Length (ft)	Weight (lbs)	Dimensions H x L x W (in)
								10'	20'	30'	40'	50'	60'		Feet	PSI	(,	(150)	11 X Z X W (III)
520301	18S-CIM	1-1/2	230	60	1	15.5	3450	160	137	111	84	50	15	3" FNPT	64	27.7	20	96	18.4 x 13.0 x 8.4
520300	18S-CIM	1-1/2	208	60	1	16.0	3450	160	137	111	84	50	15	3" FNPT	64	27.7	20	94	18.4 x 13.0 x 8.4
520302	18S-CIM	1-1/2	200-208	60	3*	13.5	3450	160	137	111	84	50	15	3" FNPT	64	27.7	20	96	18.4 x 13.0 x 8.4
520303	18S-CIM	1-1/2	230	60	3*	11.5	3450	160	137	111	84	50	15	3" FNPT	64	27.7	20	94	18.4 x 13.0 x 8.4
520304	18S-CIM	1-1/2	460	60	3*	5.3	3450	160	137	111	84	50	15	3" FNPT	64	27.7	20	94	18.4 x 13.0 x 8.4

Continuous Duty Rated — Little Giant Wastewater pumps are rated continuous duty as long as they are run within the published ratings for these pumps.

^{*3-}phase pumps require control panel

Construction						
Cover	Epoxy-coated cast iron					
Motor Housing	Epoxy-coated cast iron					
Impeller Material	Red brass					
Impeller Type	Non-clog					
Volute	Epoxy-coated cast iron					
Power Cord	14/3, SOW (1-phase); 14/4, SOW (3-phase)					
Mechanical Shaft Seal	Carbon/ceramic					
Fasteners	Stainless steel					
Shaft	Stainless steel					
Bearings	Upper and lower ball bearings					

Performance Data Flow - Liters/Minute 100 200 300 400 500 600 0 70 20.0 60 50 Feet 40 Head -10.0 30 20 10 0 20 40 60 80 100 120 140 160 180 Flow - Gallons/Minute



Oklahoma City, OK 73157-2010 Phone: 1.800.701.7894 Fax: 1.800.678.7867 www.LittleGiantPump.com

