


Submersible Pump w/ DFC2 Deluxe Controller Model PVL-ES-DFC2



Pump Specifications

Horsepower: 1/3	RPM: 1550
Volts: 115	Full Load Amps: 6.0
Power Cord: 10'	Weight: 28 lbs.
Dimensions: (H x L x W in.):	9.90" x 8.80" x 8.50"

Performance Curve

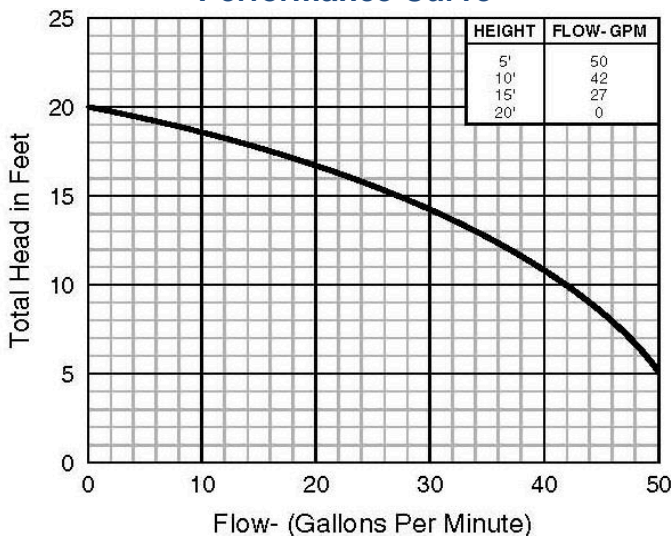

PVL-ES-DFC2 Features

Energy Savings Pump

- 1/3HP permanent split capacitor motor with thermal overload protection
- Proven design – thousands in daily use
- Cast iron pump housing for quiet operation
- Oil filled motor housing for lifetime lubrication and rapid heat dissipation
- Effluent rated – vortex impeller, passes limited amount of 1/2" solids
- High output; 42 gpm @ 10' tdh
- Energy Savings – uses 50% less power than most sump pumps
- CSA Certified

Dual Float Switch

- Two micro reed activated floats for added reliability
- Protective cage prevents debris from interfering with floats
- Mounts to discharge pipe with included hardware
- Easy installation

DFC2 Deluxe Controller

- Monitors pump and power conditions and sounds an alarm when problems are detected
- Sounds alarm when:
 - AC pump has failed
 - Pump or float problem is detected
 - 9V battery is low or slide switch is off
- Activates pump weekly – extending pump life
- Includes export terminals for connection to a remote dialer or home security system
- Adjustable run time from 5 to 45 seconds after the water level falls below the sensor or the float drops

3 Year Limited Warranty