Auto Reset / Battery Backup / Auxiliary Contacts

VERSA'LARM"- Flood Alarm

Leading Edge Design





Early Warning - Notification While You're Away - Power Outages - Expandable

A standard Versa'larmTM - Flood Alarm includes an alarm panel and a WaterSpotterTM sensor. The sensor may be up to 2,500 feet from the Versa'larm where water needs to be detected. Receive immediate notification of threatening water levels by connecting an Auto Dialer to the Versa'larm. The Auto Dialer will call four contact numbers when an alarm occurs. Install a standard 9 volt battery to ensure the system will operate during power outages or accidental unplugging of the unit. Once the standard Versa'larm - Flood Alarm is installed, add accessories to create a total "Home Protection System." Add up to six WaterSpottersTM for complete property protection. Add the low temperature switch option with an Auto Dialer and get Furnace Failure notification while away from home.

Stand-Alone Alarm

Install the standard Versa'larm™ - Flood Alarm

(Includes one Versa'larmTM and one WaterSpotterTM) A standard alarm may be all that you need. Expand at any time if you want additional coverage, simply add accessories for customized protection.

Typical Applications:


Floor Drain - Water Heater - Laundry Room - Sink/Dishwasher Office/Computer Room - Utility Room



Expanding the Versa'larm $^{ exttt{ iny }}$

At anytime you can expand your stand-alone alarm system for total home protection

any combination of four telephones, cell phones or pagers and delivers a recorded alarm message.

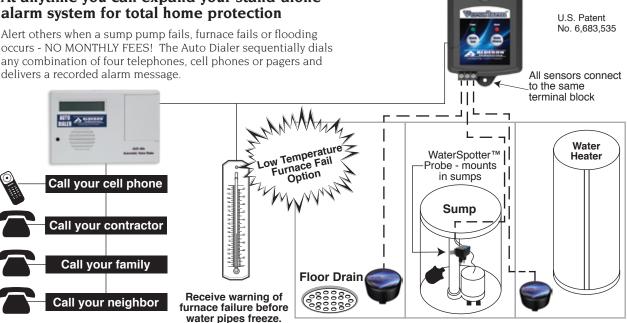



Auto Reset / Battery Backup / Auxiliary Contacts

VERSA'LARM™- Flood Alarm

Specifications



WaterSpotter™

Voltage 9-12 VDC

Caution


Connect only to an Alderon Versa'larm™ monitoring system

Operating Current 3 mA

Switching Current 500 mA maximum

Probes

Stainless steel



Features

Thin Film Water Detection

Less than 1/16 inch, for early warning before damage occurs

Solid State Circuitry

No moving parts, no maintenance

Epoxy-Encapsulated Circuit

Waterproof-tamperproof-trouble free

Stainless Steel Probes

Resist rust and corrosion

Easy Mount EnclosureMounts on flat surfaces

3-year Warranty

VERSA'LARM[™]

Primary Power 120 VAC, 60 Hz

Secondary Power Class 2, 9-11 VDC, 500 mA

Auxiliary Contacts

Normally Open

Class 2, 24 VDC/24 VAC (50/60Hz), 100 mA maximum

Battery

Standard 9 VDC (not included)

Buzzer

103 db @ 2 ft

Switch

9 VDC, 200 mA minimum (Signaling device) Single pole, single throw



Features

LED Light & Buzzer

Excellent audio/visual in poor conditions

Test/Silence Switches, Automatic Buzzer Reset

Guarantees alarm

Battery Backup

Protection during power outages

Alarm Auxiliary Contacts

Connect to Auto Dialers Remote alarms

Connect Up to Six

Waterspotter ** **Sensors** Flexibility for zone protection

Type 1 Enclosure with External Mounting Flange

Mounts in minutes

Indicator Lights

Indicates power and alarm status

CSA Listed / 3-Year Warranty

United States and Canada

Guaranteed Safety and Performance

Order Numbers



Versa'larm™



WaterSpotter™



WaterSpotter™ Probe



Furnace Fail



Auto Dialer

Part	
Number	Description
7003	Versa'larm™ - Flood Alarm (includes WaterSpotter™)
Accessories (Expanded Applications)	
7008	WaterSpotter TM (Flood Sensor)
7009	WaterSpotter TM Probe (Sump Sensor)
7018	Low Temperature Sensor (need to order 7006 or 7019 also)
7006	Auto Dialer: one common message used for all sensors
7019	Auto Dialer: two different messages, one for water sensor and one for furnace fail



Leading Edge Control Products

CS1003A