



# JMI PUMP SYSTEMS

Your Partners in Pumping Since 1958

W194 N11695 McCormick Drive  
Germantown, WI 53022

262-253-1353 • 800-234-5490

www.jmipumps.com • sales@jmipumps.com

## COMMERCIAL GRADE SUBMERSIBLE SUMP PUMP

### Model PVL-EC-MAN


## FEATURES

- Cast iron pump housing for quiet operation
- Oil-filled motor housing for lifetime lubrication and rapid heat dissipation
- 1/3 HP permanent split capacitor motor with thermal overload protection
- Low power usage – 5.0 full load amps
- Commercial grade epoxy coating for corrosion and rust resistance
- Stainless steel screws, bolts, and handle
- Mechanical Seals – nitrile parts with carbon and ceramic faces
- Upper and lower ball bearings
- Effluent Rated – passes limited amount of 1/2" spherical solids
- 1-1/2" NFPT discharge
- CSA Certified
- Three-year limited warranty



SPECIFICATIONS	
HORSEPOWER:	1/3
VOLTS:	115
POWER CORD:	20'
RPM:	1550
FULL LOAD AMPS:	5.0
WEIGHT:	28 lbs
DIMENSIONS (H X L X W):	11" x 9" x 9"

CONSTRUCTION	
COVER:	Epoxy Coated Cast Iron
MOTOR HOUSING:	Epoxy Coated Cast Iron
IMPELLER TYPE/MATERIAL:	Vortex / Nylon
VOLUTE:	Epoxy Coated Cast Iron
POWER CORD:	SJTW-A
MECHANICAL SHAFT SEAL:	Nitrile w/carbon & ceramic face
FASTENERS:	Stainless Steel
SHAFT:	Cold Rolled Steel
BEARINGS:	Upper & Lower Ball Bearings

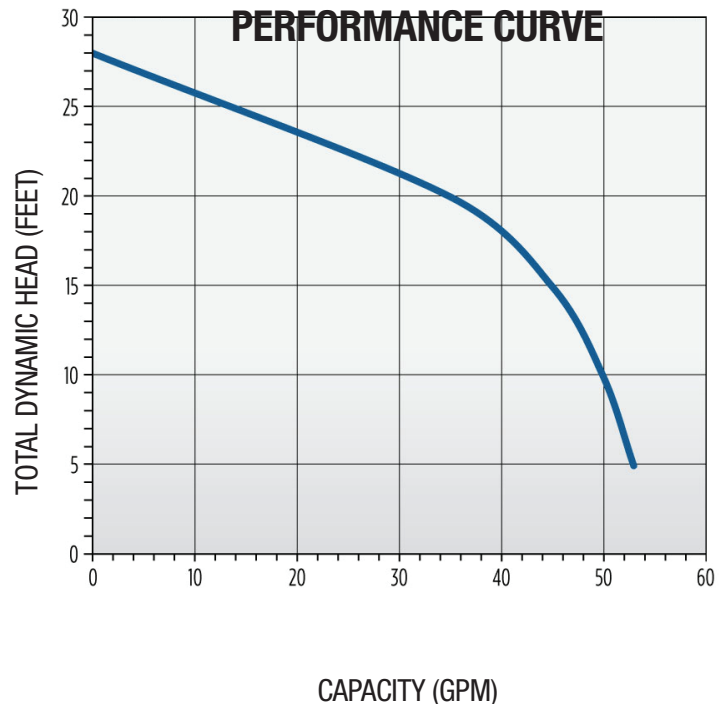

Specifications subject to change without notice

PVL-EC-MAN-042221