



115-230 V 60 Hz | USC

Automatic Pressurization System With Inverter



PEDROLLO
MADE IN ITALY



Automatic Pressurization System With Inverter



- **DG PED is an automatic pressurisation system with inverter which integrates:**
 - high efficiency self-priming pump
 - Expansion vessel
 - Pressure and flow rate sensors
 - Non-return valve
- **DG PED is a compact, autonomous, quiet and high performance pumping system.**
- **A sophisticated electronically controlled inverter, at the heart of the system, in an intuitive way:**
 - maintains the pressure of the installation constant by regulating the speed of the pump in accordance with the required flow rate
 - controls the hydraulic and electric operating parameters and protects the pump from anomalies
 - can be equipped with an expansion card that makes it possible to work in parallel with other inverters in the pumping groups by managing input and output signals
 - adapts to every type of pressurization system, including existing ones
 - limits the starting and operating currents in order to provide a greater saving of energy



ALL IN ONE

Main components:
 Multistage self-priming pump
 Expansion vessel
 Non-return valve
 Intuitive control panel



COMPACT DIMENSIONS



DOMESTIC USE

A single DG PED meets the requirements of single apartments or small houses



LOW-NOISE



CONSTANT PRESSURE



EASY TO USE



RESIDENTIAL USE

Two DG PED assembled as a set meet the requirements of more than one apartment



INSTALLABLE ANYWHERE

Thanks to its compactness and low noise level the DG PED can be installed anywhere



MADE IN ITALY

COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV GL
 = ISO 9001 =



TECHNICAL DATA

- Supply Voltage ~ **115-230 V**
- Frequency **60 Hz**
- Insulation: Class **F**
- Max Absorbed Current:
 - **10 A** 115 V
 - **7.6 A** 230 V
- P1 Maximum Absorbed Power:
 - **1.02 HP** 115 V
 - **1.31 HP** 230 V
- Protection **IP X4**
- Factory Set Point **44 psi**

APPLICATION LIMITS

- Maximum Suction Lift up to **11 psi**
- Liquid Temperature between **32°F** and **104°F**
- Ambient Temperature between **32°F** and **104°F**
- Maximum Working Pressure **145 psi**
- Continuous Duty Rating **S1**
- Operates in a **Vertical** Position



CLEAN WATER





RESIDENTIAL



COMMERCIAL

CHARACTERISTIC CURVES

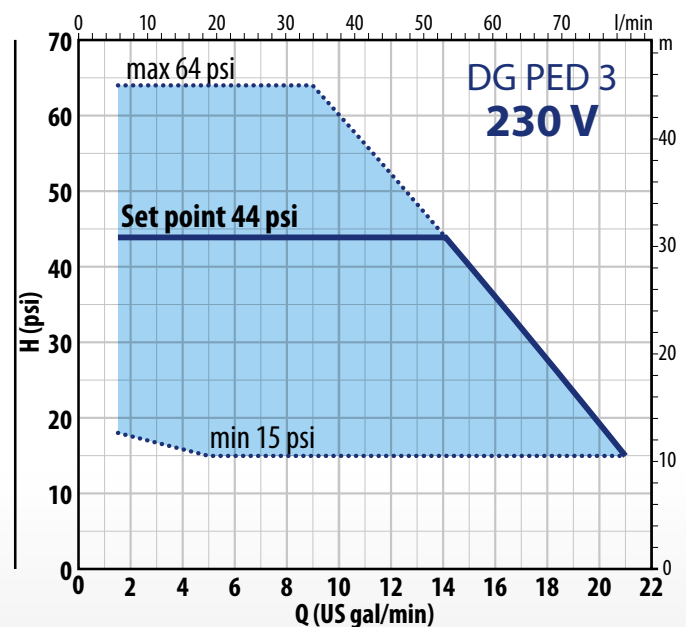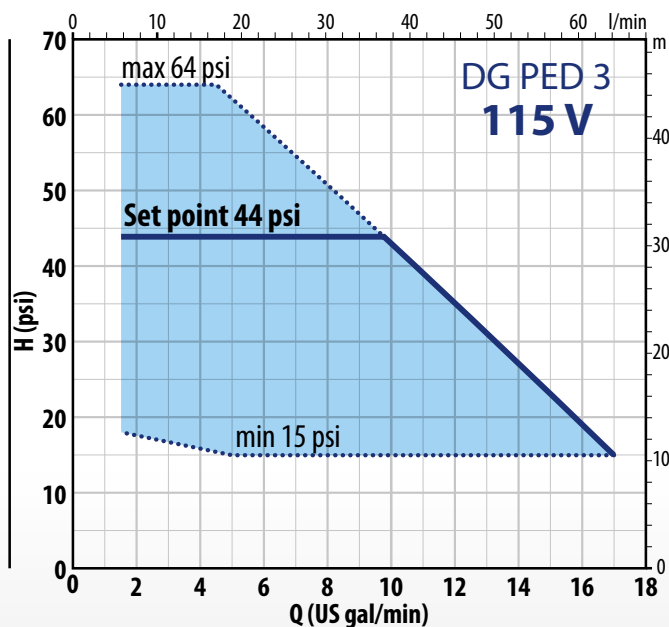



MODEL	POWER		MAX PERFORMANCES	PERFORMANCES (ADJUSTABLE SET POINT)							
	P ₂ kW	HP		▲	Q US gal/min	H psi	Min. Set Point psi	US gal/min	Set Point Stand. Setting psi	US gal/min	Max. Set Point psi
DG PED 3 – 115 V	0.55	0.75	IE3	1.5 – 17	64 – 15	15	5 – 17	44	1.5 – 9.6	64	1.5 – 4.5
DG PED 3 – 230 V	0.75	1.00		1.5 – 21	64 – 15	15	5 – 21	44	1.5 – 14	64	1.5 – 9

Q = Flow rate H = Total manometric head

▲ Three phase motor efficiency class (IEC 60034-30-1)

Tolerance of characteristic curves in compliance with EN ISO 9906 Grado 3B.

DIMENSIONS AND WEIGHT (inch)

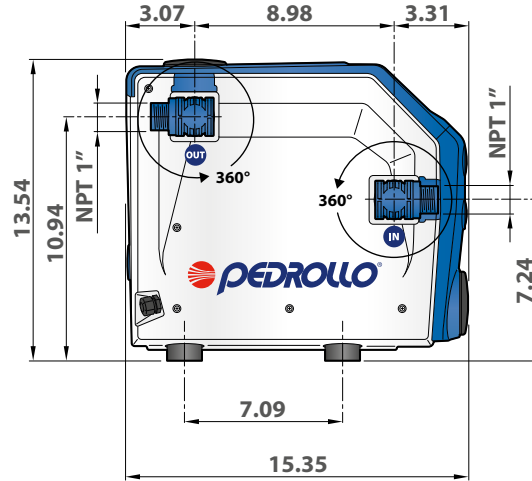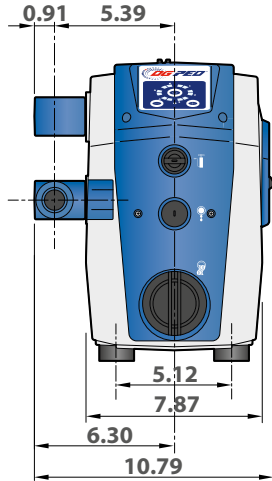

kg 33 lb

